


strataworx®

specifications

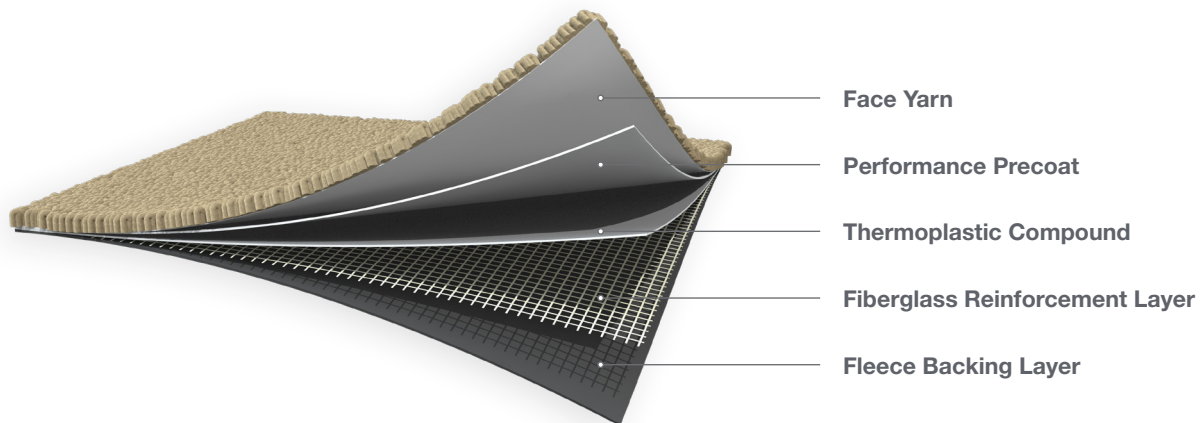

backing description

Lightweight polymer composite backing system engineered for efficiency in manufacturing, transportation, and at the job site

where

Interior environments requiring modular flooring

features and benefits

- Innovative lightweight backing for maximum efficiency
- Ease of handling, installation, and storage
- Alternative to broadloom carpet or PVC carpet tile

primary

Synthetic

stabilizer

Fiberglass reinforcement layer

weight

45 oz/yd² (average weight excluding face fiber)

dimensions

24" x 24" (standard)

tests

Radiant Panel Fire -Class 1 (based on pile construction)

NBS Smoke < 450 (based on pile construction)

Meets CRI Green Label Plus requirements

installation

We recommend using a ¾" foam or nap roller to apply an approved pressure sensitive adhesive, Shaw 5000, 5100, 5036, 5800, and 5900. Use of a 1/16 x 1/32 x 5/64 u-notch trowel can be used as well, however this application method will increase the overall bond strength and reduce the ease of removing and replacing tiles and requires additional adhesive. Approximate coverage rates are 35-40* yards per gallon when applied with a roller, and 28 -33* yards per gallon when applied with a trowel.

*Coverage rates are for estimating purposes only. Actual jobsite coverages may vary according to skill of the installer, porosity/texture of the sub floor or type/angle of trowel used.

warranty

10 Year Commercial Limited

packaging

20 tiles/box, 8.88 sq. yd. or 80 sq. ft./box

technical support

Shaw Contract Inforum Call 1.877.502.7429 or email inforum@shawinc.com