


## EcoWorx® Tile

backing system:	<b>EcoWorx®</b>
backing description:	<b>100% PVC- free recyclable backing system with recycled content, made from thermoplastic polyolefin compound with reinforcing layer</b>
where:	<b>high performance environments requiring modular flooring</b>
why:	<b>thermoplastic alternative to PVC dimensional stability of PVC with 40% less weight than a PVC alternative superior delamination and edge ravel strengths to PVC lower VOCs and smoke density test results than PVC 100% recyclable with recycled content and lower embodied energy than PVC</b>
backing process:	<b>1. high performance precoat for maximum tuft bind 2. thermoplastic laminate for superior delamination strength 3. fiberglass reinforcement for unmatched stability 4. final thermoplastic layer for added stability 5. die-cut into carpet tiles</b>
average thickness:	<b>0.095 inch                      0.2413 cm</b>
primary:	<b>synthetic</b>
stabilizer:	<b>fiberglass mat</b>
weight:	<b>75 oz/ yd<sup>2</sup> (average)    2644.65 g/m<sup>2</sup></b>
dimensions:	<b>24" x 24"                      60.96 cm x 60.96 cm</b> <b><i>additional tile sizes available</i></b>

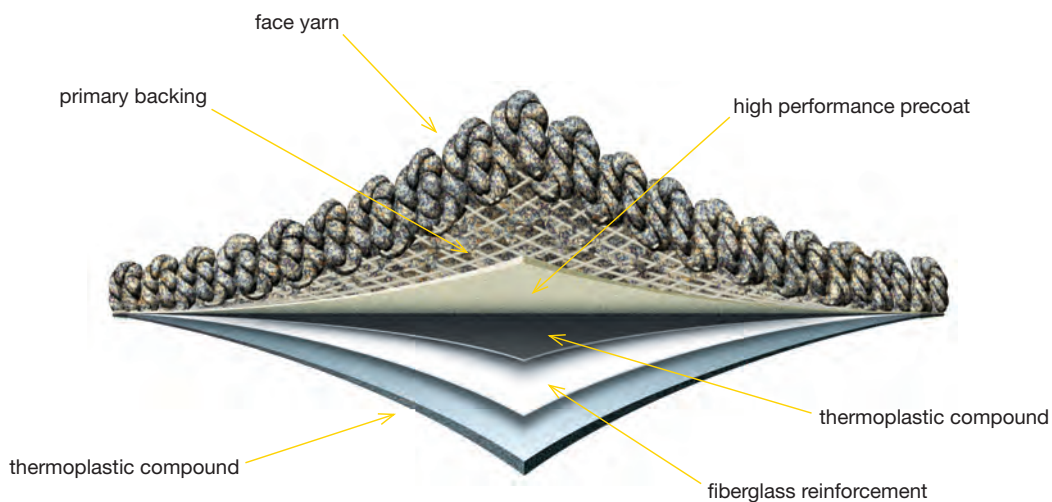

## EcoWorx® Tile

---

testing:	<b>Radiant Panel Fire Class I (based on pile construction)</b> <b>NBS Smoke &lt; 450 (based on pile construction)</b> <b>Passes CRI Green Label Plus Requirements</b> <b>Moisture Barrier - 24 hour British Spill</b>
antimicrobial:	<b>optimal antimicrobial protection when installed with Shaw 5036 (passed AATCC 174)</b>
installation:	<b>Shaw 5000, 5100, 5800, 5036, EcoWorx ES, LokDots</b>
warranty:	<b>lifetime commercial limited</b>