


Ultraloc MB®

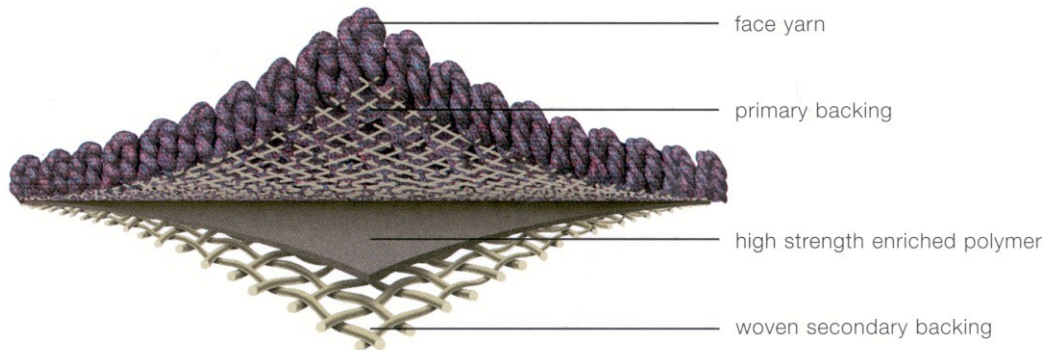

backing system	Ultraloc®
backing description	High strength enriched polymer precoat and secondary coat laminated to a woven polypropylene secondary backing.
backing process	<p>3-step process</p> <ol style="list-style-type: none"> 1. Direct application of high-strength enriched polymer to back of carpet face. 2. Light coat of high-strength enriched polymer to woven secondary backing. 3. Layers are joined at compression roller.
primary	Synthetic
weight	35 oz/yd ² (average)
width	12 feet (standard); optional widths available
test	<p>Radiant Panel Fire -Class 1 (based on pile construction)</p> <p>NBS Smoke < 450</p> <p>TVOCs < 500 micrograms/sqm/hr</p> <p>(meets CRI Green Label requirements)</p>
installation	Direct glue with Shaw Subset 1000 or Shaw Subset 1200 Antimicrobial Subset 1036
warranty	Lifetime commercial
shawcontractgroup.com	To download details on installation, specifications, and warranties on-line call shaw inforum 1.877.502.7429 for personal assistance